

FDC6-225

Datasheet

FULBAT[®]

DEEP CYCLE BATTERY



AGM





FDC Series are Deep Cycle AGM Carbon batteries specifically designed for frequent discharge deep cycle application. With non-spillable design and maintenance free, AGM FDC Series offer low self-discharge and ensure a maximum service life with high resistance to cycles. Thanks to carbon additives, these batteries can perfectly be used with good performance without being 100% charged. This range offers reliable performance for electric vehicle and other applications such as golf cart, aerial work platform, cleaning machine, marine, solar energy...

FEATURES

- Deep Cycle AGM technology (VRLA)
- Non-spillable & maintenance free
- No acid handling
- Deep Cycle design for high capacity and maximum life
- Reinforced grid/plates design for optimal cyclic use
- Robust, safe & reliable
- Carbon additives to perform in Partial State of Charge (PSOC) and to increase charging efficiency
- Low self-discharge rate for longer shelf life

TERMINAL



SPECIFICATIONS

Voltage	Capacity	Reserve capacity
6 V	246 Ah (100hr)	490 min (25A)
	225 Ah (20hr)	135 min (75A)
	210 Ah (10hr)	
	192 Ah (5hr)	

OPERATING TEMPERATURE


Discharge	-15°C ~ 50°C
Charge	0°C ~ 40°C
Storage	-15°C ~ 40°C

CHARGING INSTRUCTIONS

Max current	33.6A
Float	6.85V - 6.95V
Cyclic	7.35V - 7.45V

DIMENSIONS & WEIGHT

Length	260±2mm
Width	180±2mm
Total Height	253±2mm
Gross weight	30.5kg

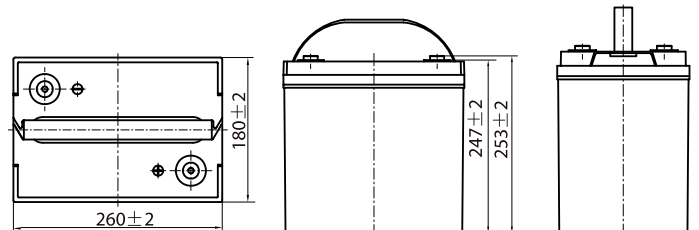

APPLICATIONS




Aerial work platform



Golf cart



Floor cleaning machine




Solar

FDC6-225


Datasheet




FDC AGM CHARGING PROFILE

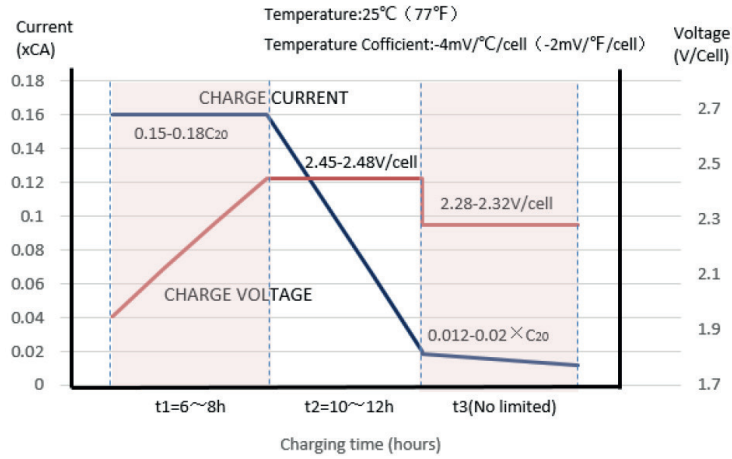

RELATIONSHIP OF OCV AND STATE OF CHARGE (25°C)

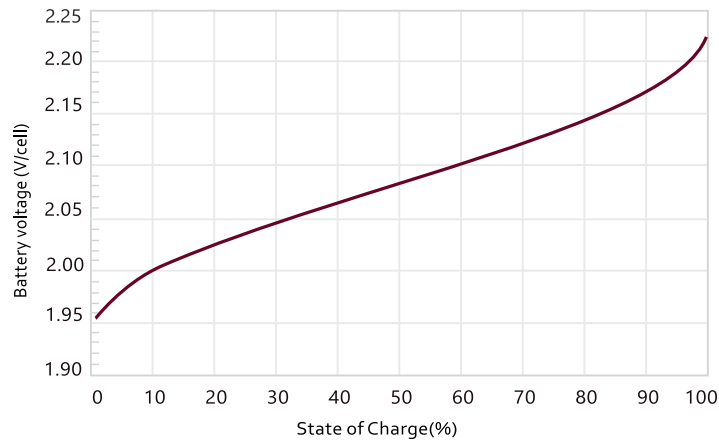

CYCLE LIFE IN RELATION TO DEPTH OF DISCHARGE

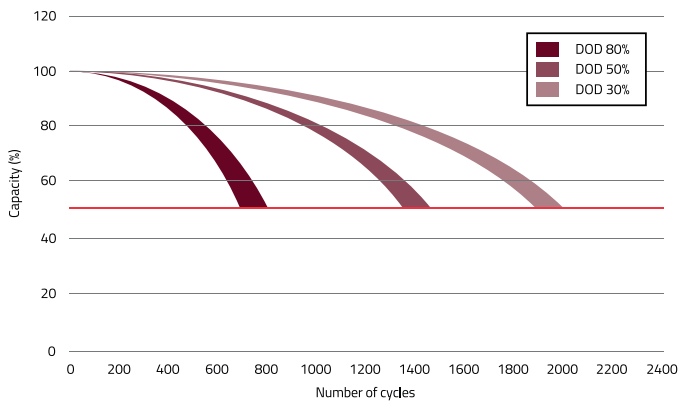

SELF-DISCHARGE CHARACTERISTIC

